

CATALOG 2018

MOBILE LIVING MADE EASY.

EVERYTHING YOU NEED TO KNOW ABOUT
HYGIENE & SANITATION PRODUCTS FOR YOUR VESSEL

 **DOMETIC**



DEAR FREEDOM LOVER,

There are millions of people around the world who use Dometic Products. You all have one thing in common. You're going somewhere – whether you're an RV user, a boat owner, a truck driver or just a lover of the great outdoors.

Our job is to meet your essential needs on the journey. Like cooking, keeping food fresh, taking care of personal hygiene and maintaining a pleasant temperature. That way, you can explore more, see more and stay away longer. We call it mobile living made easy.


Enjoy the journey.





TOILETS

PAGE 8-23

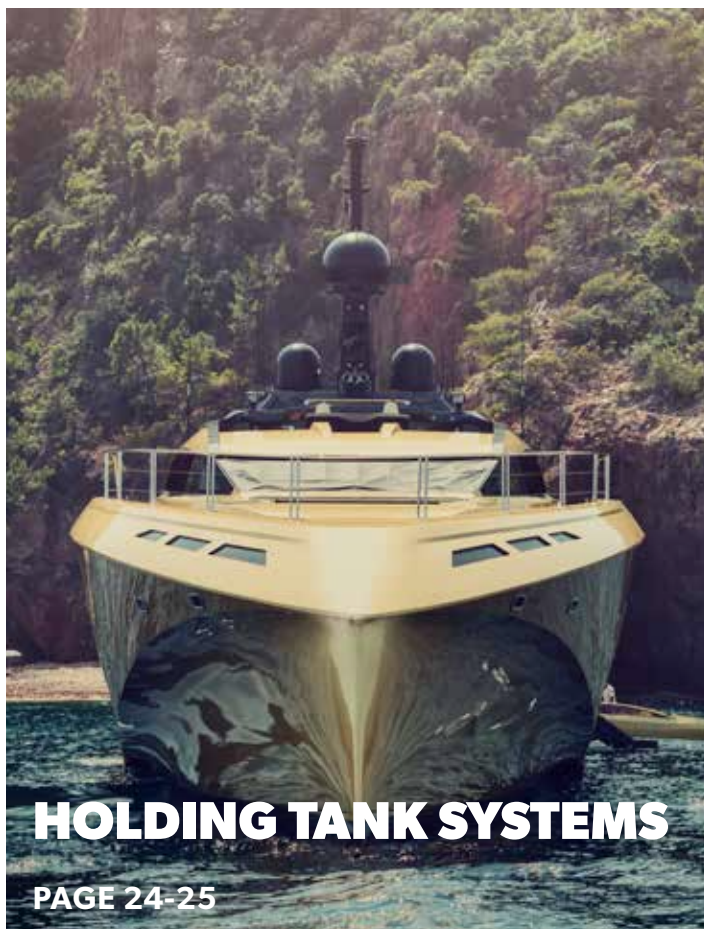


HOLDING TANK SYSTEMS

PAGE 24-25




TOILET SYSTEM COMPONENTS

PAGE 26-27

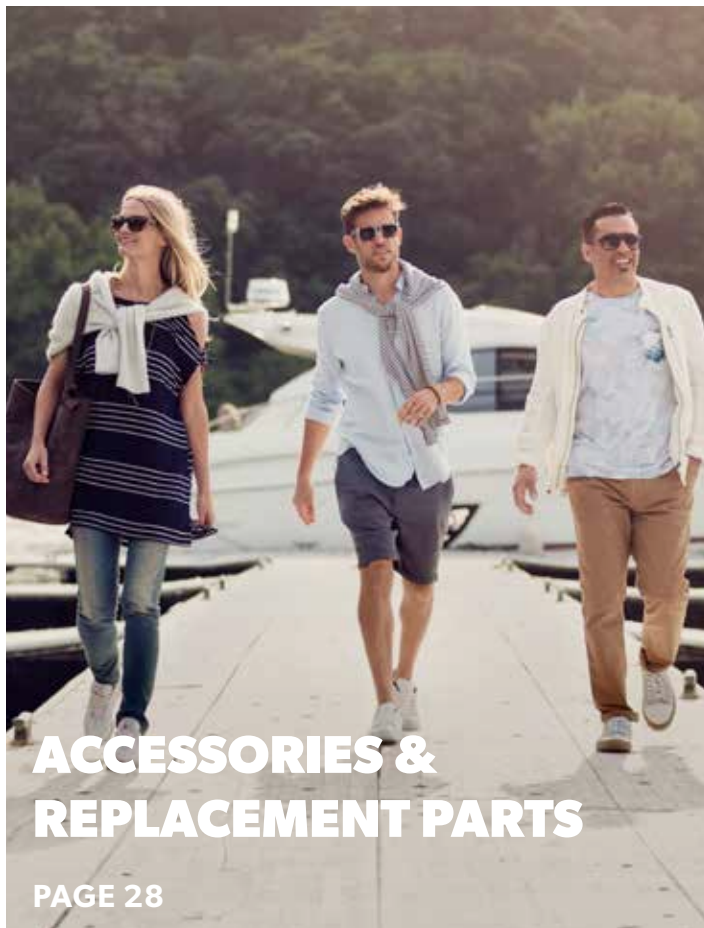

ACCESSORIES & REPLACEMENT PARTS

PAGE 28

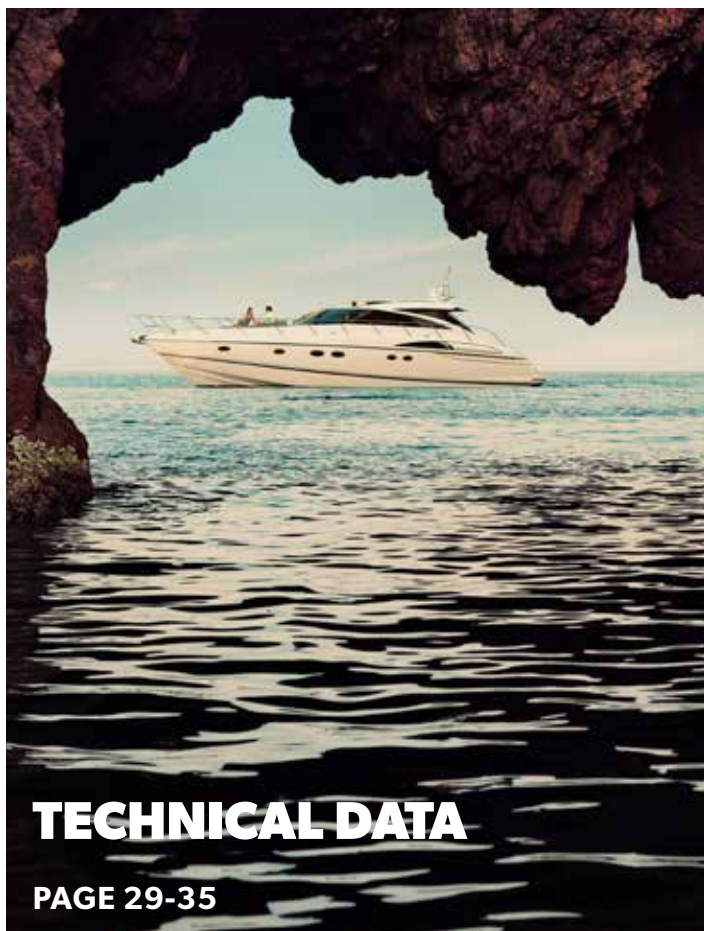

TECHNICAL DATA

PAGE 29-35

TOILETS

MasterFlush Series Toilets	8 - 15
RushFlush Series Toilets	16
Dometic Control Panels	17
4300 & 4400 Series Toilets	18 - 19
500H Series Toilets	20 - 21
970 & 960 Series Portable Toilet	22 - 23

HOLDING TANK SYSTEMS

HTS-T Series Holding Tanks	24
HTS Basic Series Holding Tanks	25
DHT-L Series Holding Tanks	25

TOILET SYSTEM COMPONENTS

DTM01C Tank Monitoring System	26
DTM01 Tank Monitoring System	26
DTMF04 Tank Monitoring System	26
DTM04 Tank Monitoring System	26
DTM08 Tank Monitoring System	27
DTM12 Tank Monitoring System	27
DTD Control Panel	27
DSS Panel	27
DNF Panel	27

ACCESSORIES & REPLACEMENT PARTS

OdorSafe Plus Hoses	32
MaxFlex Hoses	32
DTK Driptube Kit	32
T Series Waste Discharge Pump	32
TankSaver	32
ECO Holding Tank Vent Filter	32

TECHNICAL DATA

Technical Data	29 - 35
----------------	---------

DOMETIC ON THE WEB

Here's where you can find the complete Dometic range, with detailed information about all products. Plus, interesting facts about our company and download links for all our catalogs.

[DOMETIC.COM](https://www.dometic.com)



HYGIENE & SANITATION

ENJOY YOUR CRUISE WITH HOME-LIKE SANITATION COMFORT

We want you to travel in complete comfort. This is the idea behind our hygiene range, which offers sophisticated, mobile toilet concepts and practical, easy-to-use accessories for undiminished vacation enjoyment. Reap the benefits of decades of research and development with homelike comfort and convenience, and the pleasant feeling of freshness, free from unpleasant odors.

Dometic provides toilet solutions for every size of boat and every demand on comfort. For reliable and odor-free waste discharge, our engineers have designed a holding tank system that is easy to install and use.



TOILETS

Dometic MasterFlush electric macerator toilets – quick and easy to install, quiet and with a powerful flush. Dometic portable toilets with 360° pressurized flush, large flush water tank and splash-free disposal system.

HOLDING TANK SYSTEM

Stores toilet black water until it can be discharged. Choose from a large range of tanks in various shapes and sizes. Or construct a tailor-made system with our holding tank accessories and components.



An underwater photograph with a teal and blue color palette. In the upper right, a hand reaches down towards the water surface. A chain hangs vertically from the surface, passing through the center of the frame. The bottom of the image shows dense, dark green aquatic plants.

/ TOILETS
/ HOLDING TANK SYSTEMS
/ TOILET SYSTEM COMPONENTS
/ ACCESSORIES & REPLACEMENT PARTS

HYGIENE SANITATION



**ENE &
ATION**



UPSCALE ELEGANCE & COMFORT

Dometic MasterFlush 8900 macerator toilets offer luxurious looks with user-friendly features. The Dometic 8900 series toilets not only satisfy diverse owner preferences but also meet virtually any boat builder's requirements too. To help manage water use, this series offers "Normal" flush and "Low" flush settings. The angled back and compact footprint ensure a great fit in almost any head, the ceramic bowl is easy to clean, while its soft-close seat prevents any sudden bangs! Finally, having a macerator flushing system allows the waste holding tank to be located away from the toilet, isolating any smells and ensuring

a pleasant environment inside the vessel. It also transforms waste into a fluid slurry which results in a thorough and easy discharge of the holding tank.

- Powerful macerator flush
- Small footprint – fits in most any head compartment
- Standard and low-profile heights
- Through the floor and through the wall discharge fittings
- Toilet only or toilet/bidet combination models
- "Soft close" seat prevents slamming





DOMETIC MASTERFLUSH 8939

Macerator toilet - low profile height

- Powerful flush with steel macerator
 - Compact design with angled back saves space
 - Conserve water with low flush option
 - Elegant low-profile design suits any bathroom
 - Ergonomically shaped seat closes softly to avoid noise and damage
-



DOMETIC MASTERFLUSH 8949

Macerator toilet - low profile height, bidet/combo

- Powerful flush with steel macerator
 - Compact design with angled back saves space
 - Conserve water with low flush option
 - Elegant low-profile design suits any bathroom
 - Ergonomically shaped seat closes softly to avoid noise and damage
-



DOMETIC MASTERFLUSH 8979

Macerator toilet - standard height

- Powerful flush with steel macerator
 - Compact design with angled back saves space
 - Conserve water with low flush option
 - Elegant design suits any bathroom
 - Ergonomically shaped seat closes softly to avoid noise and damage
-



DOMETIC MASTERFLUSH 8989

Macerator toilet - standard height, bidet/combo

- Powerful flush with steel macerator
 - Compact design with angled back saves space
 - Conserve water with low flush option
 - Elegant design suits any bathroom
 - Ergonomically shaped seat closes softly to avoid noise and damage
-

MASTERFLUSH 8700 SERIES MACERATOR TOILET

Enjoy the upscale look and user-friendly performance of a premium residential toilet with the Dometic 8700 series of MasterFlush toilets. The elongated seat and deep bowl provide ultimate comfort, and the high-performance macerator pump assures thorough flushing every time while operating 30 % more efficiently than other macerator heads.



POWERFUL FLUSH
MACERATING

QUIETER FLUSH
SHORTER DURATION

TWO FLUSH OPTIONS
NORMAL AND LOW

STANDARD-HEIGHT ALL-CERAMIC MACERATOR TOILET IN A FULL-SIZE FIXTURE

For the look and user-friendly performance of an upscale residential toilet with the advantage of low-flush technology, Dometic MasterFlush 8700 series macerator toilets, powered with MasterFlush technology, deliver it all. Discriminating owners will appreciate the full-scale residential styling,

complete with elongated enameled seat and lustrous, sparkling ceramic finish. The robust effluent macerator operates 30% more efficiently than previous Dometic macerator toilets. Two flush options promote efficient water consumption. This white model is also available in bone color.



DOMETIC MASTERFLUSH 8740

- Electronic flush handle with chrome finish
- Quieter, shorter flush duration than other macerator toilets
- Two flush options: Normal or Low allow efficient water consumption
- Standard-height toilet with residential-size bowl and elongated seat for premium comfort
- Through-the-floor or through-the-wall discharge fittings
- Available in white or bone colors



DOMETIC MASTERFLUSH 8743

- Standard Dometic flush touchpad or Vimar, Gewiss compatible switch panel
- Quieter, shorter flush duration than other macerator toilets
- Two flush options: Normal or Low allow efficient water consumption
- Standard-height toilet with residential-size bowl and elongated seat for premium comfort
- Through-the-floor or through-the-wall discharge fittings
- Available in white or bone colors



AT HOME COMFORT

Elongated residential-style seat



ADDED CONVENIENCE

Handle or wall-switch operation



MAXIMUM RINSE

Powerful bowl-clearing flush action



DOMETIC MASTERFLUSH 8639

Macerator toilet - low profile height

- Powerful macerator flush
- Flat back-style ceramic fixture – fits nicely against interior walls
- Standard and low-profile heights
- Ultra-quiet flushing
- Through-the-floor and through-the-wall discharge fittings
- “Soft close” seat action
- “Normal” or “Low” flush options
- Dometic electronic touchpad, standard
- Vimar or Gewiss compatible switch, optional (order separately)
- 12 V DC or 24 V DC operation



DOMETIC MASTERFLUSH 8649

Macerator toilet - low profile height, bidet/combo

- Powerful macerator flush
- Flat back-style ceramic fixture – fits nicely against interior walls
- Standard and low-profile heights
- Ultra-quiet flushing
- Toilet/bidet combination
- Through-the-floor and through-the-wall discharge fittings
- “Soft close” seat action
- “Normal” or “Low” flush options
- Dometic electronic touchpad, standard
- Vimar or Gewiss compatible switch, optional (order separately)
- 12 V DC or 24 V DC operation



DOMETIC MASTERFLUSH 8640

Macerator toilet - standard height

- Powerful macerator flush
- Flat back-style ceramic fixture – fits nicely against interior walls
- Standard and low-profile heights
- Ultra-quiet flushing
- Through-the-floor and through-the-wall discharge fittings
- “Soft close” seat action
- “Normal” or “Low” flush options
- Dometic electronic touchpad, standard
- Vimar or Gewiss compatible switch, optional (order separately)
- 12 V DC or 24 V DC operation



DOMETIC MASTERFLUSH 8112

Macerator toilet - low profile height, 12 V DC

- A space saving low-profile model
 - Easy to install with only the toilet and flush control panel to fit
 - Normal and Dry Bowl flush options allow efficient water consumption
 - Compatible with a remote holding tank
 - Through-the-floor or through-the-wall discharge fittings
-



DOMETIC MASTERFLUSH 8116

Macerator toilet - low profile height, 24 V DC

- A space saving low-profile model
 - Easy to install with only the toilet and flush control panel to fit
 - Normal and Dry Bowl flush options allow efficient water consumption
 - Compatible with a remote holding tank
 - Through-the-floor or through-the-wall discharge fittings
-



DOMETIC MASTERFLUSH 8152

Macerator toilet - standard height, 12 V DC

- Easy to install with only the toilet and flush control panel to fit
 - Normal and Dry Bowl flush options allow efficient water consumption
 - Compatible with a remote holding tank
 - Through-the-floor or through-the-wall discharge fittings
-



DOMETIC MASTERFLUSH 8156

Macerator toilet - standard height , 24 V DC

- Easy to install with only the toilet and flush control panel to fit
 - Normal and Dry Bowl flush options allow efficient water consumption
 - Compatible with a remote holding tank
 - Through-the-floor or through-the-wall discharge fittings
-

MASTERFLUSH 7100/7200 SERIES MACERATOR TOILET

An attractive and space saving macerator toilet with residential proportions and fresh water or seawater flush configurations. By incorporating clever 360° ORBIT technology it fits perfectly into a small area. It is quiet, effective and energy efficient by design and purpose-built for retrofitting into small boats.



PERFECT FIT
ROTATING BASE INSTALLATION

POWERFUL FLUSH
MACERATING

ENERGY EFFICIENT
LOW POWER CONSUMPTION



DOMETIC MASTERFLUSH 7120

Macerator toilet - medium height, fresh water flush

- (ORBIT) Omnidirectional Rotating Base Installation Technology
- Powerful macerating flush
- Enameled wooden seat for added comfort
- Energy efficient and low water consumption



DOMETIC MASTERFLUSH 7160

Macerator toilet - medium height, seawater flush

- (ORBIT) Omnidirectional Rotating Base Installation Technology
- Powerful macerating flush
- Enameled wooden seat for added comfort
- Energy efficient and low water consumption



DOMETIC MASTERFLUSH 7220

Macerator toilet - low profile height, fresh water flush

- (ORBIT) Omnidirectional Rotating Base Installation Technology
- Powerful macerating flush
- Enameled wooden seat for added comfort
- Energy efficient and low water consumption



DOMETIC MASTERFLUSH 7260

Macerator toilet - low profile height, seawater flush

- (ORBIT) Omnidirectional Rotating Base Installation Technology
- Powerful macerating flush
- Enameled wooden seat for added comfort
- Energy efficient and low water consumption

RUSHFLUSH TOILETS

The energetic RushFlush power begins with two high-pressurized water lines that converge at the bowl – through the high-capacity upper rim for a thorough bowl-

clearing rinse every time, and a simultaneously charged water jet at the bottom of the bowl that drives it to the discharge plumbing.



DOMETIC RUSHFLUSH 9400

- Wall switch flush
- Dual high-velocity water jets clear the bowl and propel effluent to holding tank
- Elongated residential-style seat for the comfort of home
- Available in white and bone colors



DOMETIC RUSHFLUSH 9300

- Flush handle
- Dual high-velocity water jets clear the bowl and propel effluent to holding tank
- Elongated residential-style seat for the comfort of home
- Available in white and bone colors





USER-FRIENDLY FLUSHING OPERATION

Complete the luxurious appeal of Dometic all-ceramic toilets with this selection of marine-grade wall-mounted flush switches. Standard Dometic models are complete and ready to install, while Vimar- and Gewiss- compatible models require only the correct style frame that matches the existing electronic trim in the boat.

- Complete add water/flush control at the touch of a button
- Integrated power/full tank indicator lights show when toilet is ready to flush*
- Fast installation with ethernet cable* (RJ45 connectors)
- 12 or 24 V DC operation

* not available on toggle switch

DOMETIC DFT PANEL

- “Add water” switch on left side
- “Normal” flush switch on right side
- “Power on” and “full tank” indicator lights
- Dimensions (W x H): 3.25 x 2 in / 83 x 51 mm

DOMETIC DFST PANEL

- “Normal” flush switch on left side
- “Add water” and “dry bowl flush” switch on right side
- Dimensions (W x H): 3.25 x 3.25 in / 83 x 83 mm

DOMETIC DFS PANEL

- “Add water” and “flush” switches on left side
- “Power on” and “full tank” indicator lights on right side
- Dimensions (W x H): 3.42 x 3 in / 89 x 76 mm

DOMETIC DFP PANEL

- “Add water” and “flush” switches on left side
- “Power on” and “full tank” indicator lights on right side
- Dimensions (W x H): 3.42 x 3 in / 89 x 76 mm

DOMETIC DFS-1F PANEL

- “Normal” flush switch

DOMETIC DSF-2F PANEL

- “Add water” and “dry bowl” flush switch

DOMETIC 4300/4400 SERIES TOILET

With its European styling and 100 percent vitreous china construction, Dometic 4300/4400 series toilets offer the upscale look and user-friendly performance of a premium residential toilet with elongated seat, deep bowl, and electronic flush to provide the ultimate comfort in marine sanitation.



LUXURIOUS
FULL CHINA

POWERFUL FLUSH
ELECTRONIC TRIGGER

COMFORTABLE
RESIDENTIAL SEAT

AT-HOME COMFORT

With an enameled, elongated seat, residential height and a lustrous high-fired vitreous china fixture, Dometic 4300/4400 series toilets make you feel right at home. Electric flush offers versatility by allowing the use to add water or flush.



DOMETIC 4310 TOILET

- Eco-friendly, low-water consumption at 0.33 gal. per flush
- Electronic flush handle in chrome finish
- Elongated residential-style seat for the comfort of home
- White or bone colors
- Gravity flush system



DOMETIC 4410 TOILET

- Eco-friendly, low-water consumption at 0.33 gal. per flush
- Electronic switch
- Elongated residential-style seat for the comfort of home
- White or bone colors
- Gravity flush system



AT HOME COMFORT

Elongated residential-style seat



ADDED CONVENIENCE

Handle or wall-switch operation



MAXIMUM RINSE

Powerful bowl-clearing flush action



GRAVITY-FLUSH TOILETS

The 500 series of gravity-flush toilets are available in sparkling white or bone color finishes and provide the comforts of home with an elongated seat, anti-splash rim and deep bowl. These boat toilets install directly above a holding tank. The patented, water-conserving flush mechanism creates an airtight seal and uses as little as 0.10 gal./0.39 l per foot-pedal flush.

- Low-flush water consumption: less than one pint (0.10 gal./0.39 l) per flush
- Pedal flush requires no electric power
- Elongated enameled wood seat and residential-style deep bowl for enhanced comfort
- Proven in thousands of marine applications





DOMETIC 510+PS

Dometic 500 series marine toilets provide ultra low-flush water conservation and trouble-free performance while providing all the comforts of a household toilet. Easy pedal operation enables hands-free flushing.

- Standard height toilet
- Low-flush water consumption: less than one pint (0.10 gal./0.39 l) per flush
- Pedal flush requires no electric power
- Elongated enameled wood seat and residential-style deep bowl for enhanced comfort
- Proven in thousands of marine applications



DOMETIC 511+PS

This water efficient gravity toilet is a leading favorite with marine applications. It is easy to install, easy to clean and includes a 1 year warranty.

- Low profile toilet
- Low-flush water consumption: less than one pint (0.10 gal./0.39 l) per flush
- Pedal flush requires no electric power
- Elongated enameled wood seat and residential-style deep bowl for enhanced comfort
- Proven in thousands of marine applications



DOMETIC 711-M28

The Dometic 711-M28 marine toilet is a complete toilet and holding tank system in one package. This Type III MSD has a 9 gal. (36 l) tank and makes a great replacement for recirculating toilets.

- Ceramic toilet bowl and high-strength polyethylene tank provide many years of use
- Odor-free using freshwater flush
- Low-flush water consumption: less than one pint (0.10 gal./0.39 l) per flush
- Available in white or bone color finishes
- Solid enameled wood seat for home-like comfort



HYGIENIC AND COMPACT: PORTABLE TOILETS

Convenient, space-saving hygienic comfort for your boat. The portable toilets from Dometic combine many useful functions in the smallest of spaces.

- Portable toilet available in 2.5 gal and 5.0 gal holding tank capacities
- 2.6 gallons fresh water tank – sufficient for 27 flushes
- Back-up tank, discharge kit and mounting kit as accessories





DOMETIC SANIPOTTIE 972

- Fresh water tank capacity: 2.6 gallons
- Holding tank capacity: 2.5 gallons
- Dimensions (W x H x D): 13 x 15¼ x 15¼ in
- Weight: 13 lbs



DOMETIC SANIPOTTIE 974

- Fresh water tank capacity: 2.6 gallons
- Holding tank capacity: 2.5 gallons
- Dimensions (W x H x D): 13 x 15¼ x 15¼ in
- Weight: 13 lbs



DOMETIC SANIPOTTIE 975

- Fresh water tank capacity: 2.6 gallons
- Holding tank capacity: 5.0 gallons
- Dimensions (W x H x D): 13 x 15¼ x 15¼ in
- Weight: 13 lbs



DOMETIC SANIPOTTIE 976

- Fresh water tank capacity: 2.6 gallons
- Holding tank capacity: 5.0 gallons
- Dimensions (W x H x D): 13 x 15¼ x 15¼ in
- Weight: 13 lbs



DOMETIC SANIPOTTIE 962

- Fresh water tank capacity: 2.6 gallons
- Holding tank capacity: 2.5 gallons
- Dimensions (W x H x D): 14½ x 12 x 16½ in
- Weight: 11 lbs



DOMETIC SANIPOTTIE 964

- Fresh water tank capacity: 2.6 gallons
- Holding tank capacity: 2.5 gallons
- Dimensions (W x H x D): 14½ x 12 x 16½ in
- Weight: 11 lbs



DOMETIC SANIPOTTIE 965

- Fresh water tank capacity: 2.6 gallons
- Holding tank capacity: 5.0 gallons
- Dimensions (W x H x D): 14½ x 15½ x 16½ in
- Weight: 14 lbs



DOMETIC SANIPOTTIE 966

- Fresh water tank capacity: 2.6 gallons
- Holding tank capacity: 5.0 gallons
- Dimensions (W x H x D): 14½ x 15½ x 16½ in
- Weight: 14 lbs




HOLDING TANKS FOR MARINE TOILETS

These holding tanks provide long-lasting performance and efficiency. They are constructed from a high-strength polyethylene with a heavy-duty wall thick enough to maintain integrity under high pressure and to avoid leaks. They are pre-plumbed with inlet and discharge fittings, a vent fitting, an inspection port and a pressure relief valve. Already pressure tested, just plug in and go.

DOMETIC HTS-T SERIES HOLDING TANK SYSTEMS

Boatowners can now realize the benefits of a user-friendly, properly-sized holding tank in virtually any Type III MSD system with this wide selection of Dometic holding tank systems. Both HTS-T and Basic series use top-mounted fittings and diptube discharge plumbing to prevent potential leaks. Multiple discharge outlets eliminate need for complex plumbing and extra discharge line connections.

10 HTS-T: 10 gal capacity
28 HTS-T: 28 gal capacity
40 HTS-T: 40 gal capacity

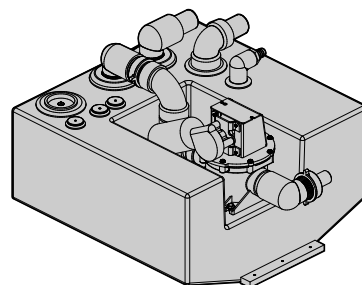



DOMETIC DHT-L SERIES HOLDING TANK SYSTEMS

The Dometic DHT42L is the smallest in this series of holding tanks designed to fit the most popular of boat models. There are five favored tank sizes to choose from: 42, 60, 87, 110, and 136 l. The DHT-L series holding tank systems are pre-plumbed with inlet and discharge fittings, a vent fitting, inspection port and a pressure relief valve.

DHT42L: 11 gal capacity
 DHT61L: 16 gal capacity
 DHT88L: 23 gal capacity
 DHT110L: 29 gal capacity
 DHT137L: 36 gal capacity



DOMETIC HTS BASIC SERIES HOLDING TANK SYSTEMS

This leak-proof holding tank is designed with 6.3 mm thick walls and a highly durable polyethylene construction of odor-free use. HTS tanks use top-mounted fittings and diptube discharge plumbing to prevent potential leaks. The vacuum relief valve prevents damage from high-capacity dockside vacuum pumps.

12 HTS-VRT: 11 gal capacity
 12 HTS-HRZ: 11 gal capacity
 15 HTS-VRT: 15 gal capacity
 15 HTS-HRZ: 15 gal capacity
 20 HTS-VRT: 18 gal capacity
 20 HTS-HRZ: 18 gal capacity
 25 HTS-HRZ: 25 gal capacity
 28 HTS-HL: 28 gal capacity
 30 HTS-HRZ: 28 gal capacity
 35 HTS-HL: 35 gal capacity
 40 HTS-HRZ: 34 gal capacity
 50 HTS-VRT-HL: 50 gal capacity
 50 HTS-HRZ-HL: 50 gal capacity
 55 HTS-HRZ: 55 gal capacity
 80 HTS-HRZ: 80 gal capacity



DOMETIC DTM04 TANK MONITOR SYSTEM

DTM04 four-level tank monitor system for waste holding tank. Includes one set of tank probes.

ITEM:

313604001 - 1 cap assembly with vent, 22-in. stems

313604002 - 1 cap assembly, 22-in. stems

313604003 - 1 cap assembly with vent, 45-in. stems

313604004 - 1 cap assembly, 45-in. stems



DOMETIC DTM08 TANK MONITOR SYSTEM

DTM08 four-level tank monitor system for waste holding tank and freshwater tank. Includes two sets of tank probes.

ITEM:

360608001 - 2 cap assemblies with vent, 22-in. stems

360608002 - 2 cap assemblies, 22-in. stems

360608003 - 2 cap assemblies with vent, 45-in. stems

360608004 - 2 cap assemblies, 45-in. stems



DOMETIC DTM12 TANK MONITOR SYSTEM

DTM12 four-level tank monitor system for waste, graywater, and freshwater tanks. Includes three sets of tank probes.

ITEM:

360612001 - 3 cap assemblies with vent, 22-in. stems

360612002 - 3 cap assemblies, 22-in. stems

360612003 - 3 cap assemblies with vent, 45-in. stems

360612004 - 3 cap assemblies, 45-in. stems



DOMETIC DTMF04 TANK MONITOR SYSTEM

DTMF04 four-level tank monitor system for freshwater tank. Includes one set of tank probes.

ITEM:

- 360614001 - 1 cap assembly with vent, 22-in. stems
- 360614002 - 1 cap assembly, 22-in. stems
- 360614003 - 1 cap assembly with vent, 45-in. stems
- 360614004 - 1 cap assembly, 45-in. stems



DOMETIC DTM01C TANK MONITOR SYSTEM

Single-level tank monitor system indicates when waste holding tank is full. Requires 3-in. dia. threaded tank opening for probe cap.

ITEM:

- 313002312 - 1-level probe cap assembly



DOMETIC DTM01 TANK MONITOR SYSTEM

Single-level tank monitor system indicates when waste holding tank is full. Probe assembly installs on virtually any rigid tank material.

ITEM:

- 313002311 - 1-level probe assembly



DOMETIC DTD CONTROL PANEL

DTD01A or DTD02A tank discharge controls offer fully automated monitoring and discharge of holding tank contents.

ITEM:

- 313814101 - DTD01 - 12V
- 313814103 - DTD01 - 24V
- 313814201 - DTD02 - 12V
- 313814203 - DTD02 - 24V
- 313814301 - DTD01A - 12V
- 313814303 - DTD01A - 24V
- 313814401 - DTD02A - 12V
- 313814403 - DTD02A - 24V



DOMETIC DSS PANEL

- Continuous monitoring of toilet system's power status and flush readiness
- Operates on only 16 mA @ 12 V DC or 24 V DC
- Dimensions (W x H): 3.25 x 2 in / 83 x 51 mm



DOMETIC DNF PANEL

- Operates on only 16 mA @ 12 V DC or 24 V DC
- Complements other Dometic panels and controls
- Dimensions (W x H): 3.25 x 2 in / 83 x 51 mm



DOMETIC ODORSAFE PLUS SANITATION HOSES

- Best odor barrier of any marine hose
- Five-year limited warranty – two years on hose replacement and labor; three additional years on hose replacement only
- Standard component on pre-plumbed Dometic holding tank systems that require sanitation hose

ITEM:

306342871 OdorSafe Plus 1.5 in. x 50 ft.



DOMETIC MAXFLEX SANITATION HOSES

- Outstanding flexibility allows tight corners without restricting flow
- High strength, yet easy clamping for airtight connections

ITEM:

306341116 MaxFlex 1.5 in. x 50 ft.

306341145 MaxFlex 1 in. x 50 ft.

306341628 MaxFlex 0.75 in. x 50 ft.

306342590 MaxFlex 0.75 in. x 100 ft.

306345650 MaxFlex 0.625 in. x 50 ft.

306345688 MaxFlex 0.625 in. x 100 ft.



DOMETIC DTK DIPTUBE KIT

Removes waste through top of tank – eliminates stagnant waste from sitting in discharge line connected at bottom of tank.

- Prevents clogging; reduces tank effluent
- Fits tanks up to 30 in / 762 mm in height
- Easy to install



DOMETIC T SERIES WASTE DISCHARGE PUMP

For premium tank discharge performance, Dometic T series discharge pumps provide unsurpassed quality and reliability. The bellow-style T pump can run dry without threat of damage. Draws only 6 amps at 12V DC.

ITEM:

317301200 - 12V DC discharge pump

317302400 - 24V DC discharge pump

314115012 - 12V DC SaniSump sump pump

314115024 - 24V DC SaniSump sump pump



DOMETIC TANKSAVER

Marine holding tank accessory to upgrade safety, quality and performance.

- The relief valve protects your tank from collapsing due to excessive suction
- It is easy to install as no sealant is needed
- Makes an excellent odour seal too
- Material: Rubber, PE
- Dimensions: 1.5 in / 76 mm vent







DOMETIC ECO HOLDING TANK VENT FILTER





The innovative concave shape of the Dometic ECO vent filter assures that malodorous gases are completely filtered through activated odor-adsorbing charcoal media. The result is more thorough odor elimination – and the assurance of more enjoyable boating.

ITEM:

309311001 - Vent filter cartridge, mounting bracket, hardware, hose adapters

309311002 - Vent filter replacement cartridge

TECHNICAL DATA				
				
MACERATOR TOILETS	8939	8979	8949	8989
Description ¹	Low-profile macerator toilet with touchpad flush control			
Circuit Breaker/Fuse Wiring	20 amps @ 12V DC; 15 amps @ 24V DC			
Wiring	12 ga. (up to 20 ft/6.1 m total circuit)			
Water Supply ID Fitting (in/mm)	0.5/13 NPT			
Min. Water Flow Rate (gpm/lpm)	2.0/7.6			
Discharge ID Fitting (in/mm)	1.5/38 or 1/25 minimum			
Max. Discharge Horizontal Run ² (ft/m)	98/30			
Max. Discharge Vertical Run ² (ft/m)	9.8/3			
Min. Height-Seat Down ³ (in/mm)	14.75/375	18.125/460	14.75/375	18.125/460
Max. Height-Seat Up ³ (in/mm)	30.25/768	33.5/851	30.25/768	33.5/851
Width ³ (in/mm)	14.75/375	14.75/375	14.75/375	14.75/375
Depth-Wall to Front of Bowl ³ (in/mm)	14.875/378	15.75/400	14.875/378	15.75/400
Depth-Wall to Front of Base ³ (in/mm)	18.25/464	18.625/473	18.25/464	18.625/473

TECHNICAL DATA				
MACERATOR TOILETS	8740	8743	8639	8649
Description ¹	Standard-height, flat-back, all-ceramic macerator toilet with electronic flush handle on toilet**	Standard-height, flat-back, all-ceramic macerator toilet Wall-mounted flush touchpad*	Low-profile macerator toilet with touchpad flush control*	Low-profile height macerator toilet/bidet combination with touchpad flush control*
Circuit Breaker/Fuse Wiring	20 amps @ 12V DC; 15 amps @ 24V DC			
Wiring	12 ga. (up to 20 ft/6.1 m total circuit)			
Water Supply ID Fitting (in/mm)	0.5/13 NPT			
Min. Water Flow Rate (gpm/lpm)	2.5/9.5		2.0/7.6	
Discharge ID Fitting (in/mm)	1.5/38 or 1/25 minimum			
Max. Discharge Horizontal Run ² (ft/m)	98/30			
Max. Discharge Vertical Run ² (ft/m)	9.8/3			
Min. Height-Seat Down ³ (in/mm)	17.5/445	17.5/445	14/356	
Max. Height-Seat Up ³ (in/mm)	30.25/768	33.5/851	30.5/775	
Width ³ (in/mm)	14.75/375	16.5/419	14.75/375	
Depth-Wall to Front of Bowl ³ (in/mm)	22.5/572	22.5/572	19.75/502	
Depth-Wall to Front of Base ³ (in/mm)	18.5/470	18.5/470	15.375/391	






¹ Toilets available in white or bone colors. Toilet/bidet combos and manual bidets available in white only. Optional DFS or DFP flush switch must be ordered separately.






² Horizontal and vertical run distances are not cumulative. Check for adequate discharge flow if installation nears one of these limits.

³ Dimensions may vary ± 0.375 in/10 mm.

* DFT touchpad flush switch is included with all models. Optional DFS or DFP flush switch must be ordered separately.

** Flush handle available in chrome, gold, or nickel finish.

TECHNICAL DATA					
MACERATOR TOILETS	8640	8112	8116	8152	8156
Description ¹	Standard-height macerator toilet with touchpad flush control*, bottom discharge	Low-profile macerator toilet with DFST flush switch panel		Standard-height macerator toilet with DFST flush switch panel	
Circuit Breaker/Fuse Wiring	20 amps @ 12V DC; 15 amps @ 24V DC				
Wiring	12 ga. (up to 20 ft/6.1 m total circuit)				
Water Supply ID Fitting (in/mm)	0.5/13 NPT				
Min. Water Flow Rate (gpm/lpm)	2.0/7.6				
Discharge ID Fitting (in/mm)	1.5/38 or 1/25 minimum	1.5/38			
Max. Discharge Horizontal Run ² (ft/m)	98/30	98/30			
Max. Discharge Vertical Run ² (ft/m)	9.8/3	9.8/3			
Min. Height-Seat Down ³ (in/mm)	17/432	13.75/349	13.75/349	17/432	17/432
Max. Height-Seat Up ³ (in/mm)	33.5/851	28/711	28/711	32/813	32/813
Width ³ (in/mm)	14.75/375	14.75/375	14.75/375	14.75/375	14.75/375
Depth-Wall to Front of Bowl ³ (in/mm)	19.75/502	18.375/467	18.375/467	18.375/467	18.375/467
Depth-Wall to Front of Base ³ (in/mm)	16/406	14/356	14/356	15/381	15/381

TECHNICAL DATA					
					
MACERATOR TOILETS	7120	7160	7220	7260	7225
Description ¹	Medium-height macerator toilet, residential round-front bowl, DFS-1F flush switch	Medium-height macerator toilet, residential round-front bowl, DFS-1F flush switch	Low-profile macerator toilet, compact marine bowl, DFS-1F flush switch	Low-profile macerator toilet, compact marine bowl, DFS-1F flush switch	Low-profile macerator toilet, low-profile seat, compact marine bowl, DFS-1F flush switch
Water Source	Fresh (onboard)	Raw (seawater)	Fresh (onboard)	Raw (seawater)	Fresh (onboard)
Circuit Breaker/Fuse Wiring	20 amps @ 12V DC; 10 amps @ 24V DC				
Wiring	12 ga. (up to 25 ft./7.6 m total circuit)				
Water Supply ID Fitting (in/mm)	0.5/13 NPT - fresh water toilet; 0.75/19 ID - raw water toilet				
Min. Water Flow Rate (gpm/lpm)	2.0 gpm/7.6 lpm minimum at toilet - fresh water flush				
Lift (raw water flush only)	4 ft./1.2 m maximum				
Discharge ID Fitting (in/mm)	1.5 /38 or 1/25				
Max. Discharge Horizontal Run ² (ft/m)	40/12.2 maximum				
Max. Discharge Vertical Run ² (ft/m)	4/1.2 maximum				
Min. Height-Seat Down ³ (in/mm)	13.75/349	13.75/349	12.25/311	12.25/311	11.5/292
Max. Height-Seat Up ³ (in/mm)	28.75/730	28.75/730	26.25/667	26.25/667	26.5/673
Width ³ (in/mm)	15/381	15/381	14.5/368	14.5/368	14.5/368
Depth-Wall to Front of Bowl ³ (in/mm)	19/483	19/483	18.75/476	18.75/476	18.75/476
Depth-Wall to Front of Base ³ (in/mm)	13.75/349	13.75/349	13.75/349	13.75/349	13.75/349



¹ Toilets available in white or bone colors. Optional DFS-2F or DFST flush switch must be ordered separately if desired.






² Horizontal and vertical run distances are not cumulative. Check for adequate discharge flow if installation nears one of these limits.

³ Dimensions may vary ± 0.375 in/10 mm.

* DFT touchpad flush switch is included with all models. Optional DFS or DFP flush switch must be ordered separately.

** Flush handle available in chrome, gold, or nickel finish.







TECHNICAL DATA		
GRAVITY TOILETS	9300	9400
Description ¹	Standard-height gravity toilet with electronic flush handle	Standard-height gravity toilet with DFT flush touchpad
Circuit Breaker/Fuse Wiring	2 amps @ 12V DC; 1 amp @ 24V DC	
Upper Rim Water Supply (in./mm)	0.5/13 NPT	
Lower Bowl Jet Water Supply (in./mm)	1/25 NPT	
Water Flow Rate (gpm/lpm)	15/57 @ 30-50 PSI/207-345 kPa	
Discharge Inside Diameter (in./mm)	1.5/38 pipe or 1.875/47 hose	
Discharge Horizontal Run ² (ft/m)	Gravity drain	
Min. Height-Seat Down ³ (in./mm)	17.5/445	17.5/445
Max. Height-Seat Up ³ (in./mm)	33.5/851	33.5/851
Width ³ (in./mm)	16.5/419	14.0/356
Depth-Wall to Front of Bowl ³ (in./mm)	21.5/546	21.5/546
Depth-Wall to Front of Base ³ (in./mm)	17.0/432	17.0/432
Depth-Wall to Center of Base ³ (in./mm)	11.0/279 (Centerline Rough-In)	







TECHNICAL DATA					
GRAVITY TOILETS	4310	4410	510+PS	511+PS	711-M28
Description ¹	Standard-height, all-ceramic, gravity-discharge toilet with electric flush handle	Standard-height, all-ceramic, gravity-discharge toilet with electric wall switch	Standard-height, foot pedal flush, gravity-discharge toilet	Low-profile, foot pedal flush, gravity-discharge toilet	Self-contained, standard-height toilet/holding tank combination, foot pedal flush
Discharge	Through the floor	Through the floor	Through the floor; 3 in./76 mm ID ABS or PVC flange connection directly over holding tank		1.5 in./38 mm ID plumbing
Circuit Breaker/Fuse Wiring	2 amps / 12 V DC		N/A	N/A	N/A
Wiring	14 ga. (up to 20 ft. / 6.1 m from breaker)		N/A	N/A	N/A
Water Supply ID Fitting (in./mm)	0.5/13 NPT	0.5/13 NPT	0.5/13 NPT	0.5/13 NPT	0.5/13 NPT
Min. Water Flow Rate (gpm/lpm)	2.5/ 9.5 min. at toilet		2.0/7.6 minimum at toilet		
Max Flow Pressure	40 PSI / 276 kPa		N/A	N/A	N/A
Discharge ID Fitting (in./mm)	4-bolt floor (closet) flange. 3/76 ID ABS or PVC				
Min. Height-Seat Down ³ (in./mm)	17.5/445	17.5/445	17.25/438	12.25/311	20.125/511
Max. Height-Seat Up ³ (in./mm)	33.5/851	33.5/851	32.5/826	28/711	
Width ³ (in./mm)	16.5/419	14.75/375	15.25/387	15.5/394	18.875/479
Depth-Wall to Front of Bowl ³ (in./mm)	22.5/572	22.5/572	20.5/521	20.5/521	
Depth-Wall to Front of Base ³ (in./mm)	18.5/470	18.5/470	14.625/371	14.625/371	








¹ Toilets available in white or bone colors.








² Horizontal discharge plumbing must drop 0.125 in. (3 mm) for every 1 ft. (30.5 cm) of horizontal run.

³ Dimensions may vary ± 0.375 in./10 mm.






TECHNICAL DATA						
PORTABLE TOILETS	972	974	974MSD	975	975MSD	976
Tank Capacity (gal/l)	2.6/9.8	2.6/9.8	2.6/9.8	5/19	5/19	5/19
Fresh Water (gal/l) Waste Tank (gal/l)	2.3/8.7 2.6/9.8	2.3/8.7 2.6/9.8	2.3/8.7 2.6/9.8	2.3/8.7 5/19	2.3/8.7 5/19	2.3/8.7 5/19
Dimensions H x W x D (in./mm)	12.5/317 x 13.125/333 x 15.25/387			15.24/387 x 13.125/333 x 15.25/387		
Weight (lbs/kg)	11/4.98	11/4.98	11/4.98	14/6.35	14/6.35	14/6.35
Discharge	Manual	Manual	1.5 in./38 mm ID plumbing	Manual	1.5 in./38 mm ID plumbing	Manual







TECHNICAL DATA						
PORTABLE TOILETS	962	964	964MSD	965	965MSD	966
Tank Capacity (gal/l)	2.5/9.5	2.5/9.5	2.5/9.5	5/19	5/19	5/19
Fresh Water (gal/l) Waste Tank (gal/l)	2.6/9.8 2.5/9.5	2.6/9.8 2.5/9.5	2.6/9.8 2.5/9.5	2.6/9.8 5/19	2.6/9.8 5/19	2.6/9.8 5/19
Dimensions H x W x D (in./mm)	12/305 x 14.5/368 x 16.5/419			15.5/394 x 14.5/368 x 16.5/419		
Weight (lbs/kg)	11/4.98	11/4.98	11/4.98	14/6.35	14/6.35	14/6.35
Discharge	Manual	Manual	1.5 in./38 mm ID plumbing	Manual	1.5 in./38 mm ID plumbing	Manual







						
HOSE MENDER KIT¹	90° BEND KIT¹	HOSE ADAPTER KIT¹	DOUBLE BEND KIT¹	WYE KIT¹	TEE KIT¹	PVC 45° STREET ELL
307230310	307230311	307230312	307230313	307238798	307238802	307231104
Connects 1.5 in. (38 mm) hose ends together, includes two adapters	Provides smooth sweep corner to eliminate kink, includes two adapters	Connects 1.5 in. (38 mm) hose to 1.5 in. (38 mm) FPT fitting, includes one adapter	Connects intersecting hose ends together per indicated flow, Includes three adapters	Connects intersecting hose ends together per indicated flow, includes three adapters	Connects intersecting hose ends together per indicated flow, includes three adapters	Adapts to all 1.5 in. (38 mm) fittings shown here







						
REDUCING ADAPTER	PVC 90° STREET ELL	PVC ADAPTER	CUSTOM HOSE ADAPTER	BALL VALVE	CHECK VALVE	IN-LINE CHECK VALVE
307231113	307231161	307231425	385341513	308346087	308238696	308300011
Connects 1.5 in. (38 mm) hose to 1 in. (25 mm) hose, includes one adapter	For tight corners can be used with other PVC fittings shown here	Connects 1.5 in. (38 mm) hose with Custom Hose Adapter or rigid PVC pipe to 1.5 in. (38 mm) fitting	Can be used with all 1.5 in. (38 mm) PVC fittings with socket connection, lubricated hose or cuff slides on easily	Non-corroding PVC with polymer-coated seals	For light-duty applications	For heavy-use applications check valve can be replaced without removing hoses





For use with OdorSafe Plus 1.5 in. (38 mm) ID hose. ¹ Kits include Custom Hose Adapters.

TECHNICAL DATA					
HOLDING TANKS	10 HTS-T	28 HTS-T	40 HTS-T	12 HTS-VRT	12 HTS-HRZ
Item Number	322721012 - 12V 322721024 - 24V	322012812 - 12V 322012824 - 24V	322014012 - 12V 322014024 - 24V	322840122	322840121
Capacity (gal/l)	10/38	18/8.2	98/40.9	11/42	11/42
Dimensions H x W x D (in/mm)	13.25 x 19.5 x 23.375 in 635 x 495 x 594 mm	19.5 x 19 x 30 in 495 x 483 x 762 mm	20 x 21 x 35 in 508 x 533 x 889 mm	17.75 x 8.25 x 24.5 in 451 x 210 x 622 mm	10.75 x 15.25 x 24.5 in 273 x 387 x 622 mm
Empty Weight (lbs/kg)	11/4.98	11/4.98	11/4.98	20/9.1	20/9.1
Max Weight (lbs/kg)	98/40.9	260/118	364/165	108/49	108/49

TECHNICAL DATA						
HOLDING TANKS	15 HTS-VRT	15 HTS-HRZ	20 HTS-VRT	20 HTS-HRZ	25 HTS-HRZ	28 HTS-HL
Item Number	322840152	322840151	322840202	322840201	322800251	322800281
Capacity (gal/l)	15/57	15/57	18/68	18/68	25/94	28/106
Dimensions H x W x D (in/mm)	21.5 x 12.5 x 22 in 546 x 318 x 559 mm	15 x 19 x 22 in 381 x 483 x 559 mm	16.75 x 11.5 x 28.28 in 425 x 292 x 718	14 x 14.25 x 28.25 in 356 x 362 x 718 mm	20.5 x 17 x 21 in 521 x 432 x 533 mm	14.25 x 23.5 x 35.25 in 362 x 597 x 895 mm
Empty Weight (lbs/kg)	25/11.3	25/11.3	18/68	18/68	31/14.1	37/16.8
Max Weight (lbs/kg)	145/65.8	145/65.8	171/77.6	171/77.6	231/105	261/118

TECHNICAL DATA						
HOLDING TANKS	30 HTS-HRZ	35 HTS-HL	40 HTS-HRZ	50 HTS-VRT-HL	50 HTS-HRZ-HL	55 HTS-HRZ
Item Number	322840301	322840401	322840401	322850501	322850502	322840551
Capacity (gal/l)	28/106	35/132	34/129	50/189	50/189	55/208
Dimensions H x W x D (in/mm)	14.5 x 20 x 30 in 368 x 508 x 762 mm	19.75 x 14 x 35 in 502 x 356 x 889 mm	16 x 21.75 x 30 in 406 x 552 x 762 mm	33.25 x 19 x 22 in 845 x 483 x 559 mm	21.375 x 22 x 30.75 in 543 x 559 x 781 mm	18.5 x 20 x 40 in 470 x 508 x 1016 mm
Empty Weight (lbs/kg)	37/16.8	38/17.2	41/18.6	53/24	53/24	53/24
Max Weight (lbs/kg)	261/118	318/144	313/142	453/205	453/205	493/224

TECHNICAL DATA						
HOLDING TANKS	80 HTS-HRZ	DHT42L	DHT61L	DHT88L	DHT110L	DHT137L
Item Number	322800801					
Capacity (gal/l)	80/302	11/42	16/61	23/88	29/110	36/137
Dimensions H x W x D (in/mm)	12.5 x 28 x 76 in 318 x 711 x 1930 mm	18.1 x 13.8 x 13.7 in. 460 x 350 x 348 mm	26.0 x 13.8 x 13.7 in. 660 x 350 x 348 mm	31.5 x 15.7 x 15.3 in. 800 x 400 x 388 mm	47.2 x 13.8 x 13.7 in. 1200 x 350 x 348 mm	47.2 x 15.7 x 15.3 in. 1200 x 400 x 388 mm
Empty Weight (lbs/kg)	54/24.5	12/5.4	17/7.7	22.5/10.2	30.9/14	32/14.5
Max Weight (lbs/kg)	694/315					

TECHNICAL DATA				
WASTE DISCHARGE PUMP	T SERIES 12V PUMP	T SERIES 24V PUMP	12V SANISUMP	24V SANISUMP
Item Number	317301200	317302400	314115012	314115024
Description	12V DC T series discharge pump	24V DC T series discharge pump	12V DC SaniSump sump pump	24V DC SaniSump sump pump
Weight	7 lbs. / 3.2 kg	7 lbs. / 3.2 kg	10 lbs. / 4.5 kg	10 lbs. / 4.5 kg
Power draw (avg.)	6 amps @ 12 V DC; 3 amps @ 24 V DC			
Circuit breaker/fuse*	10 amps @ 12 V DC; 5 amps @ 24 V DC			
Plumbing ID	1.5 in./38 mm sanitation hose or PVC pipe			

* Requires separate circuit breaker or fuse from other electrical equipment. Specifications subject to change without notice.

TECHNICAL DATA		
VENT FILTER	ECO HOLDING TANK VENT FILTER	ECO HOLDING TANK VENT FILTER ONLY
Item Number	309311001	309311002
Dimensions H x W x D (in/mm)	3.125 x 18.125 x 3.125 in / 79 x 460 x 79 mm	3.125 x 18.125 x 3.125 in / 79 x 460 x 79 mm
Adapter Fittings (in/mm)	.625 in / 16 mm .75 in / 19 mm 1 in / 25 mm 1.5 in / 38 mm	N/A

TECHNICAL DATA							
SANITATION HOSES	ODORSAFE PLUS	MAXFLEX	MAXFLEX	MAXFLEX	MAXFLEX	MAXFLEX	MAXFLEX
Item Number	306342871	306341116	306341145	306341628	306342590	306345650	306345688
ID (in/mm)	1.5 in / 38 mm	1.5 in / 38 mm	1.5 in / 38 mm	1.5 in / 38 mm	1.5 in / 38 mm	1.5 in / 38 mm	1.5 in / 38 mm
Length (ft/m)	50 ft / 15.2 m	50 ft / 15.2 m	50 ft / 15.2 m	50 ft / 15.2 m	100 ft / 30.4 m	50 ft / 15.2 m	100 ft / 30.4 m

TECHNICAL DATA		
HOLDING TANK ACCESSORIES	TANKSAVER RELIEF VALVE	HOLDING TANK DIPTUBE KIT
Item Number	313255247	385310660
Description	Protects holding tanks from excessive suction of dockside pumps during holding tank pump-out.	Removes waste through top of tank – eliminates stagnant waste from sitting in discharge line connected at bottom of tank.
Key Benefits	Installs easily – no sealant or spinweld required Excellent odor seal	Prevents clogging; reduces tank residual Fits tanks up to 30 in. (762 mm) high Easy to install



Dometic is a global company that makes mobile living easy – by providing great solutions to satisfy people's essential needs when they are on the move. Like cooking, taking care of personal hygiene and maintaining a pleasant temperature. We offer smart and reliable products with outstanding design.



Mobile living made easy.



AUSTRALIA

DOMETIC AUSTRALIA PTY. LTD.

1 John Duncan Court
Varsity Lakes QLD 4227
Tel +61 7 55076000
Fax +61 7 55076001
Mail sales@dometic-waeco.com.au

AUSTRIA

DOMETIC AUSTRIA GMBH

Neudorferstrasse 108
A-2353 Guntramsdorf
Tel +43 2236 908070
Fax +43 2236 90807060
Mail info@dometic.at

BELGIUM

DOMETIC BRANCH OFFICE BELGIUM

Zinkstraat 13
B-1500 Halle
Tel +32 2 3598040
Fax +32 2 3598050
Mail info@dometic.be

BRAZIL

DOMETIC DO BRASIL LTDA

Avenida Paulista 1754, conj. 111
SP 01310-920 Sao Paulo
Tel +55 11 3251 3352
Fax +55 11 3251 3362
Mail info@dometic.com.br

DENMARK

DOMETIC DENMARK A/S

Nordensvej 15, Taulov
DK-7000 Fredericia
Tel +45 75585966
Fax +45 75586307
Mail info@dometic.dk

FINLAND

DOMETIC FINLAND OY

Mestarintie 4
FIN-01730 Vantaa
Tel +358 20 7413220
Fax +358 9 7593700
Mail info@dometic.fi

FRANCE

DOMETIC SAS

ZA du Pré de la Dame Jeanne
B.P. 5
F-60128 Plailly
Tel +33 3 44633525
Fax +33 3 44633518
Mail marine@dometic.fr

GERMANY

DOMETIC WAECO INTERNATIONAL GMBH

Hollefeldstraße 63
D-48282 Emsdetten
Tel +49 (0) 2572 879-0
Fax +49 (0) 2572 879-300
Mail info@dometic-waeco.de

HONG KONG

DOMETIC GROUP ASIA PACIFIC

Suites 2207-11, 22/F, Tower 1
The Gateway, 25 Canton Road
Tsim Sha Tsui, Kowloon
Tel +852 2 4611386
Fax +852 2 4665553
Mail info@waeco.com.hk

HUNGARY

DOMETIC ZRT. SALES OFFICE

H-1147 Budapest
Kerékgyártó u. 5.
Tel +36 1 468 4400
Fax +36 1 468 4401
Mail budapest@dometic.hu

ITALY

DOMETIC ITALY S.R.L.

Via Virgilio, 3
I-47122 Forlì (FC)
Tel +39 0543 754901
Fax +39 0543 754983
Mail vendite@dometic.it

JAPAN

DOMETIC KK

Maekawa-Shibaura, Bldg. 2
2-13-9 Shibaura Minato-ku
Tokyo 108-0023
Tel +81 3 5445 3333
Fax +81 3 5445 3339
Mail info@dometic.jp

MEXICO

DOMETIC MX, S. DE R. L. DE C. V.

Circuito Médicos No. 6 Local 1
Colonia Ciudad Satélite
CP 53100 Naucalpan de Juárez
Estado de México
Tel +52 55 5374 4108
Fax +52 55 5393 4683
Mail info@dometic.com.mx

NETHERLANDS

DOMETIC BENELUX B.V.

Ecustraet 3
NL-4879 NP Etten-Leur
Tel +31 76 5029000
Fax +31 76 5029019
Mail info@dometic.nl

NEW ZEALAND

DOMETIC NEW ZEALAND LTD.

PO Box 12011
Penrose
Auckland 1642
Tel +64 9 622 1490
Fax +64 9 622 1573
Mail customerservices@dometic.co.nz

NORWAY

DOMETIC NORWAY AS

Østerøyveien 46
N-3236 Sandefjord
Tel +47 33428450
Fax +47 33428459
Mail firmapost@dometic.no

POLAND

DOMETIC POLAND SP. Z O.O

ul. Puławska 435A
PL-02-801 Warszawa
Tel +48 22 414 3200
Fax +48 22 414 3201
Mail info@dometic.pl

PORTUGAL

DOMETIC SPAIN, S.L.

Branch Office em Portugal
Rot. de São Gonçalo nº 1 - Esc. 12
2775-399 Carcavelos
Tel +351 219 244 173
Fax +351 219 243 206
Mail info@dometic.pt

RUSSIA

DOMETIC RUS LLC

Komsomolskaya square 6 - 1
RU-107140 Moscow
Tel +7 495 780 79 39
Fax +7 495 916 56 53
Mail info@dometic.ru

SINGAPORE

DOMETIC PTE LTD

18 Boon Lay Way
06-141 Trade Hub 21
Singapore 609966
Tel +65 6795 3177
Fax +65 6862 6620
Mail dometic.sg@dometic.com

SLOVAKIA & CZECH REPUBLIC

DOMETIC SLOVAKIA S.R.O.

Sales Office Bratislava
Nádražná 34/A
900 28 Ivánka pri Dunaji
Tel +421 2 45 529 680
Fax +421 2 45 529 680
Mail bratislava@dometic.com

SOUTH AFRICA

DOMETIC (PTY) LTD.

Regional Office South Africa &
Sub-Saharan Africa
2 Avalon Road, West Lake View
Ext 11, Modderfontein 1645
Tel +27 87 3530380
Mail info@dometic.co.za

SPAIN

DOMETIC SPAIN S.L.

Avda. Sierra del Guadarrama, 16
E-28691 Villanueva de la Cañada
Madrid
Tel +34 918 336 089
Fax +34 900 100 245
Mail info@dometic.es

SWEDEN

DOMETIC SCANDINAVIA AB

Gustaf Melins gata 7
SE-421 31 Västra Frölunda
Tel +46 31 7341100
Fax +46 31 7341101
Mail info@dometic.se

SWITZERLAND

DOMETIC SWITZERLAND AG

Riedackerstrasse 7a
CH-8153 Rümlang
Tel +41 44 8187171
Fax +41 44 8187191
Mail info@dometic.ch

UNITED ARAB EMIRATES

DOMETIC MIDDLE EAST FZCO

P.O. Box 17860
S-D 6, Jebel Ali Freezone
Dubai
Tel +971 4 883 3858
Fax +971 4 883 3868
Mail info@dometic.ae

UNITED KINGDOM

DOMETIC UK LTD.

Dometic House, The Brewery,
Blandford St. Mary
Dorset DT11 9LS
Tel +44 344 626 0133
Fax +44 344 626 0143
Mail info@dometic.co.uk

USA

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext.
Pompano Beach, FL 33069
Tel +1 954-973-2477
Fax +1 954-979-4414
Mail marinesales@dometicusa.com

WE DISTRIBUTE OUR PRODUCTS IN AROUND 100 MARKETS. PLEASE ASK FOR YOUR CONTACT POINT IF NOT LISTED HERE OR CHECK THE WEB.
DOMETIC.COM